




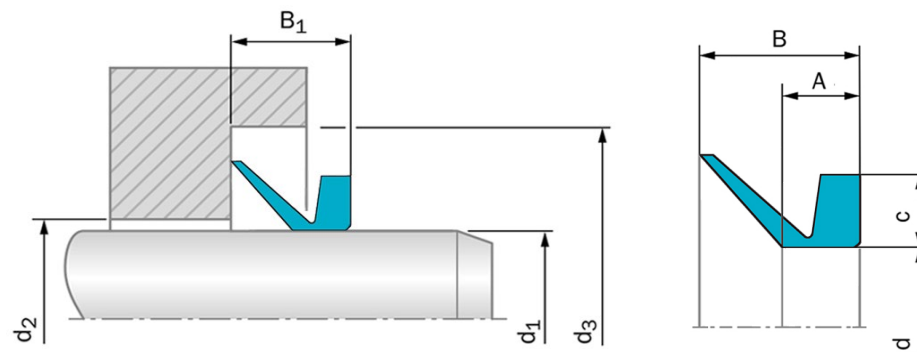


VE Type	ID	OD	Height	Shaft Diameter	Size	Wall	Maximum	Minimum	Fitted Width
Ref.	d	d + 2c	H (B)	d ₁	A	W (c)	d ₂	d ₃	B ₁
VE-450	439	499	65	450-455	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-455	444	504	65	455-460	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-460	448	508	65	460-465	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-465	453	513	65	465-470	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-470	458	518	65	470-475	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-475	463	523	65	475-480	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-480	468	528	65	480-485	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-485	473	533	65	485-490	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-490	478	538	65	490-495	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-495	483	543	65	495-500	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-500	488	548	65	500-505	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-505	493	553	65	505-510	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-510	497	557	65	510-515	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-515	502	562	65	515-520	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-520	507	567	65	520-525	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-525	512	572	65	525-530	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-530	517	577	65	530-535	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-535	521	581	65	535-540	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-540	526	586	65	540-545	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-545	531	591	65	545-550	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-550	536	596	65	550-555	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-555	541	601	65	555-560	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-560	546	606	65	560-565	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-565	550	610	65	565-570	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-570	555	615	65	570-575	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-575	560	620	65	575-580	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-580	565	625	65	580-585	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-585	570	630	65	585-590	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-590	575	635	65	590-600	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-600	582	642	65	600-610	32.5	30	d ₁ +24	d ₁ +110	50±12

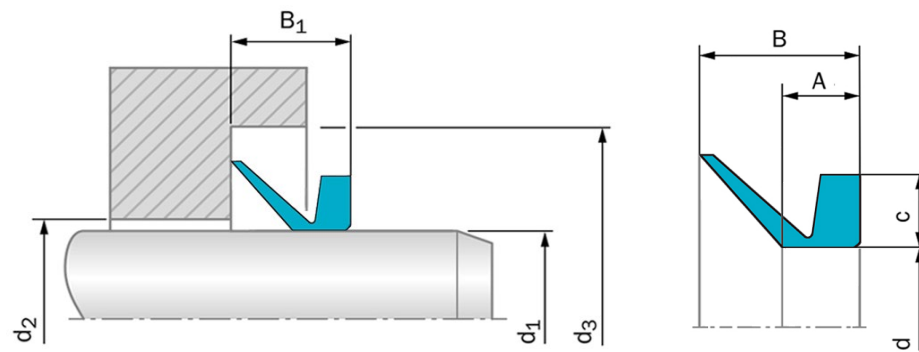

VE Type	ID	OD	Height	Shaft Diameter	Size	Wall	Maximum	Minimum	Fitted Width
Ref.	d	d + 2c	H (B)	d ₁	A	W (c)	d ₂	d ₃	B ₁
VE-610	592	652	65	610-620	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-620	602	662	65	620-630	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-630	612	672	65	630-640	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-640	621	681	65	640-650	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-650	631	691	65	650-660	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-660	640	700	65	660-670	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-670	650	710	65	670-680	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-680	660	720	65	680-690	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-690	670	730	65	690-700	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-700	680	740	65	700-710	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-710	689	749	65	710-720	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-720	699	759	65	720-730	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-730	709	769	65	730-740	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-740	718	778	65	740-750	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-750	728	788	65	750-758	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-760	735	795	65	758-766	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-770	743	803	65	766-774	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-780	751	811	65	774-783	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-790	759	819	65	783-792	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-800	768	828	65	792-801	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-810	777	837	65	801-810	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-820	786	846	65	810-821	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-830	796	856	65	821-831	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-840	805	865	65	831-841	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-850	814	874	65	841-851	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-860	824	884	65	851-861	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-870	833	893	65	861-871	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-880	843	903	65	871-882	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-890	853	913	65	882-892	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-900	871	931	65	892-912	32.5	30	d ₁ +24	d ₁ +110	50±12

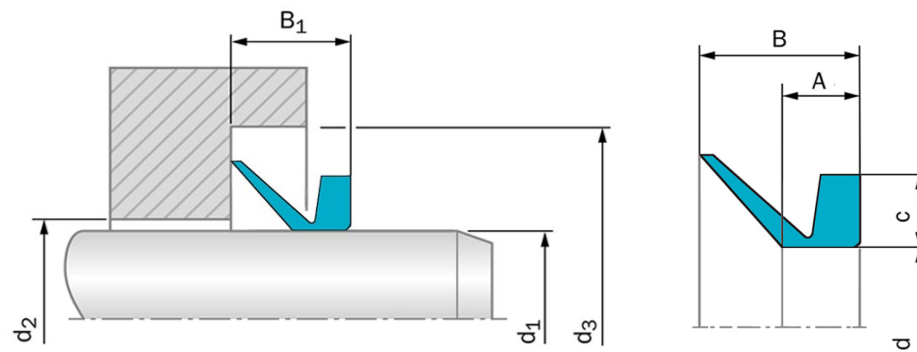

VE Type	ID	OD	Height	Shaft Diameter	Size	Wall	Maximum	Minimum	Fitted Width
Ref.	d	d + 2c	H (B)	d ₁	A	W (c)	d ₂	d ₃	B ₁
VE-920	880	940	65	912-922	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-930	890	950	65	922-933	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-940	900	960	65	933-944	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-950	911	971	65	944-955	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-960	921	981	65	955-966	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-970	932	992	65	966-977	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-980	942	1002	65	977-988	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-990	953	1013	65	988-999	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1000	963	1023	65	999-1010	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1020	973	1033	65	1010-1025	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1040	990	1050	65	1025-1045	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1060	1008	1068	65	1045-1065	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1080	1027	1087	65	1065-1085	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1100	1045	1105	65	1085-1105	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1120	1065	1125	65	1105-1125	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1140	1084	1144	65	1125-1145	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1160	1103	1163	65	1145-1165	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1180	1121	1181	65	1165-1185	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1200	1139	1199	65	1185-1205	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1220	1157	1217	65	1205-1225	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1240	1176	1236	65	1225-1245	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1260	1195	1255	65	1245-1270	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1280	1218	1278	65	1270-1295	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1300	1240	1300	65	1295-1315	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1325	1259	1319	65	1315-1340	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1350	1281	1341	65	1340-1365	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1375	1305	1365	65	1365-1390	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1400	1328	1388	65	1390-1415	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1425	1350	1410	65	1415-1440	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1450	1374	1434	65	1440-1465	32.5	30	d ₁ +24	d ₁ +110	50±12

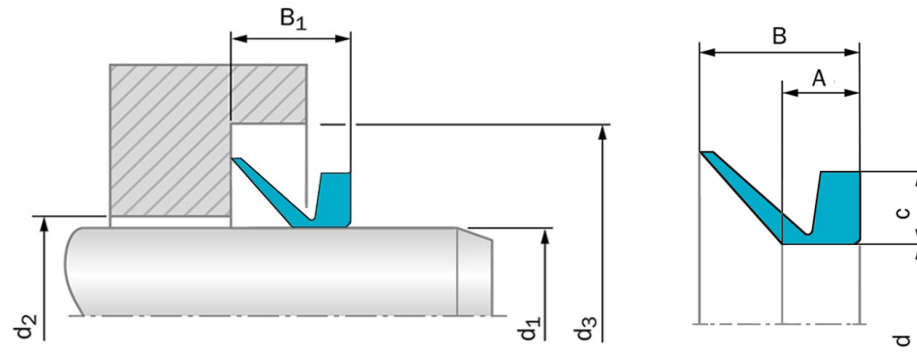

VE Type	ID	OD	Height	Shaft Diameter	Size	Wall	Maximum	Minimum	Fitted Width
Ref.	d	d + 2c	H (B)	d ₁	A	W (c)	d ₂	d ₃	B ₁
VE-1475	1397	1457	65	1465-1490	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1500	1419	1479	65	1490-1515	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1525	1443	1503	65	1515-1540	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1550	1467	1527	65	1540-1570	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1575	1495	1555	65	1570-1600	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1600	1524	1584	65	1600-1640	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1650	1559	1619	65	1640-1680	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1700	1596	1656	65	1680-1720	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1750	1632	1692	65	1720-1765	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1800	1671	1731	65	1765-1810	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1850	1714	1774	65	1810-1855	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1900	1753	1813	65	1855-1905	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-1950	1794	1854	65	1905-1955	32.5	30	d ₁ +24	d ₁ +110	50±12
VE-2000	1844	1904	65	1955-2010	32.5	30	d ₁ +24	d ₁ +110	50±12